

# PRODUKTOVÝ LIST PRIEMYSELNÝCH LÁMP CREE SÉRIA DPM




**CREE**  
Cree® XLamp® XP-E



CE RoHS

**CREE**

**MW**  
MEAN WELL

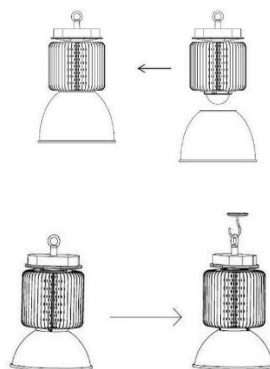

60/80W		150W	
100W / 150W		250W	
200W / 250W		400W	
300W / 350W		750W	
400W/500W		1000W	
600W		1500W	

70% Energy Saving !

LED > Metal Halide



Model	Príkion (W)	Napájacie napätie (V AC) 43-60Hz	Vyžarovací uhol (°)	CCT (K)	Krytie IP	Svetelný tok (lm/W)	Rozmer (mm) D x H	Účinník PF	Čip / Predradník	Pracovná teplota	Podanie farieb Ra
DPM80	84	120-277	80°, 100°, 120°	4000-7000	40/IP65	100-120	240x550	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM100	108	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	390x650	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM150	159	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	390x650	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM200	211	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	500x574	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM250	260	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	500x582	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM300	318	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	600x730	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM350	373	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	600x730	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80
DPM400	432	85-275	80°, 100°, 120°	4000-7000	40/IP65	100-120	600x730	>95	CREE/ MEAN WELL	mín.40 až plus 65°C	80

### Zľava :

10-20 ks -3%  
20-50 ks - 5% 50-150 ks - 7%  
151 - 250 ks 11% 250 > 15%

### Dodacie podmienky :

0-10ks 3-4 týždne  
10 ks > 7-8 týždňov

### Platobné podmienky:

Uhrada bankovým prevodom  
Zálohová platba 30-40% Po prevzatí  
tovaru 21 dní

**Záručná doba : 5 rokov**

